BENCROS
MARINE FENDERS

BAS Arch

DS-BAS-01(A)

Bencros BAS Arch Fenders have a robust design, making them ideal for general-purpose berths, exposed locations and many other applications.

BAS Arch Fenders are commonly installed horizontally or vertically, onto new or existing structures.

Minimal maintenance means they enjoy a long and trouble-free service life with low cost of ownership.

Many sizes and compounds are available, whilst custom lengths, fixing configurations can be provided on request. Please speak to Bencros.

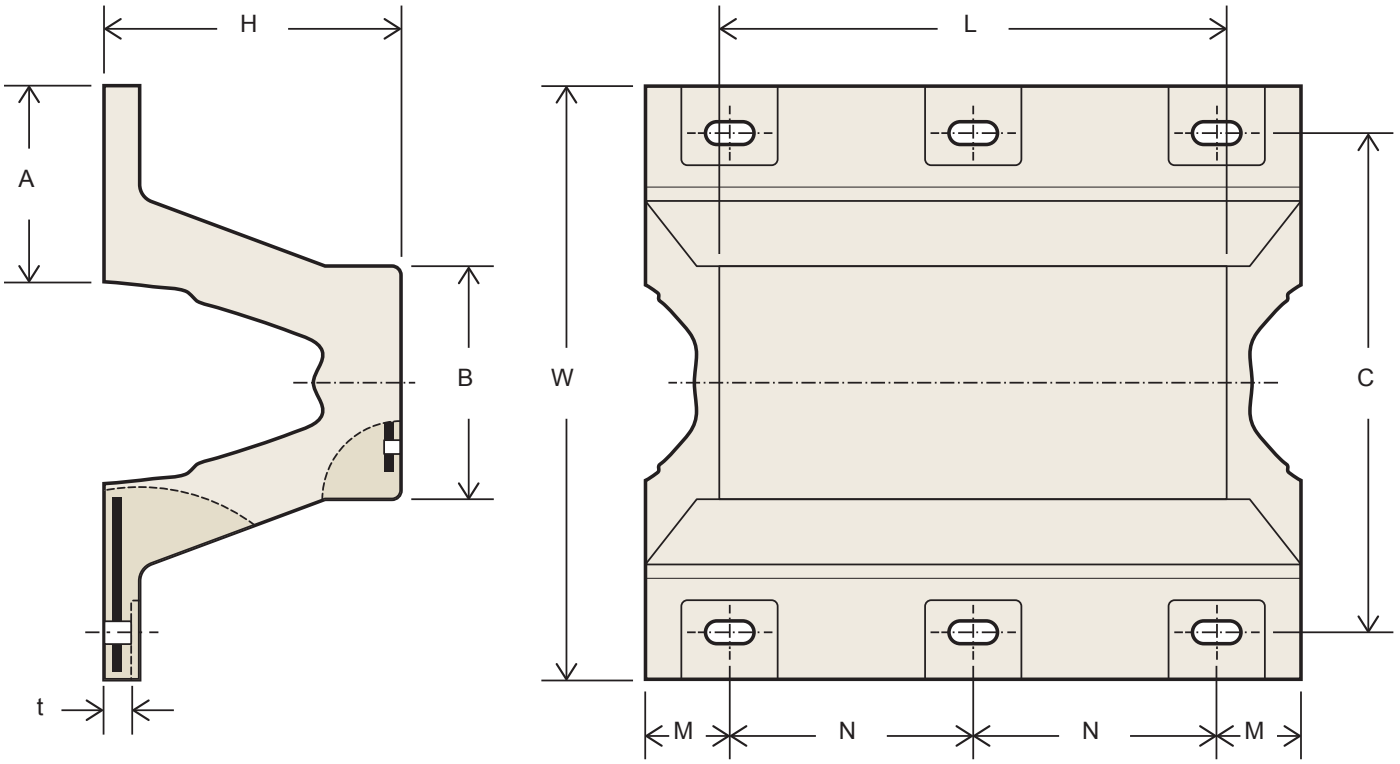

	W	A	B	C	Slot	Fixings	Mass	1000	1500	2000	2500	3000	3500
250	300	150	200	400	50 x 29	M24	300	✓	✓	✓	✓	✓	✓
300	300	215	240	480	70 x 33	M30	300	✓	✓	✓	✓	✓	✓
400	300	265	320	640	82 x 41	M36	600	✓	✓	✓	✓	✓	✓
500	1000	350	400	800	82 x 41	M36	1000	✓	✓	✓	✓	✓	✓
600	1200	425	480	960	94 x 47	M42	1000	✓	✓	✓	✓	✓	
800	1500	520	640	1280	130 x 59	M48	1000	✓	✓	✓	✓	✓	
1000	1800	610	800	1600	130 x 59	M48	1000	✓	✓	✓	✓	✓	

	L = 1000			L = 1500			L = 2000			L = 2500			L = 3000			L = 3500		
	V	N	Weight	V	N	Weight	V	N	Weight	V	N	Weight	V	N	Weight	V	N	Weight
250	175	900	88	175	700	129	175	650	169	175	600	211	175	725	251	175	600	293
300	225	900	122	225	700	179	150	650	234	225	600	290	225	725	345	225	600	402
400	150	900	206	150	700	298	150	650	388	150	600	482	150	725	575	150	600	668
500	175	900	332	175	700	475	100	650	617	175	600	762	175	725	907	175	600	1048
600	200	900	490	200	700	678	200	650	875	200	600	1070	200	725	1270			
800	250	900	849	250	700	1175	250	650	1510	250	600	1846	250	725	2183			
1000	300	900	1307	300	700	1809	300	650	2295	300	600	2816	300	725	3334			

Dimensions are in millimetres. Weights are in kilogrammes per fender.
Cross sectional tolerance is ±5% and length tolerance is ±40mm, unless otherwise agreed.
✓ Standard lengths; For non-standard lengths, please ask Bencros.

+44 20 3727 5139
sales@bencros.sk
www.bencros.com